

# Rundlochung versetzt

## Rv 3,00-5,00


DIN 24041



1:1 Darstellung

Material	Kleinformat 1000 x 2000 mm								Mittelformat 1250 x 2500 mm								Großformat 1500 x 3000 mm							
	Dicke in mm								Dicke in mm								Dicke in mm							
	0,50	0,75	1,00	1,25	1,50	2,00	2,50	3,00	0,50	0,75	1,00	1,25	1,50	2,00	2,50	3,00	0,50	0,75	1,00	1,25	1,50	2,00	2,50	3,00
Stahl feuerverzinkt*		●	●		●						●		●						●		●			
Stahl		●	●		●	●			●	●	●	●	●						●		●			
Edelstahl 1.4301 (AISI 304)			●		●						●		●											
Aluminium AL 99,5 (EN AW-1050A)		●	●		●	●																		
Aluminium ALMG3 (EN AW-5754)			●		●						●		●						●					

\* feuerverzinktes Vormaterial

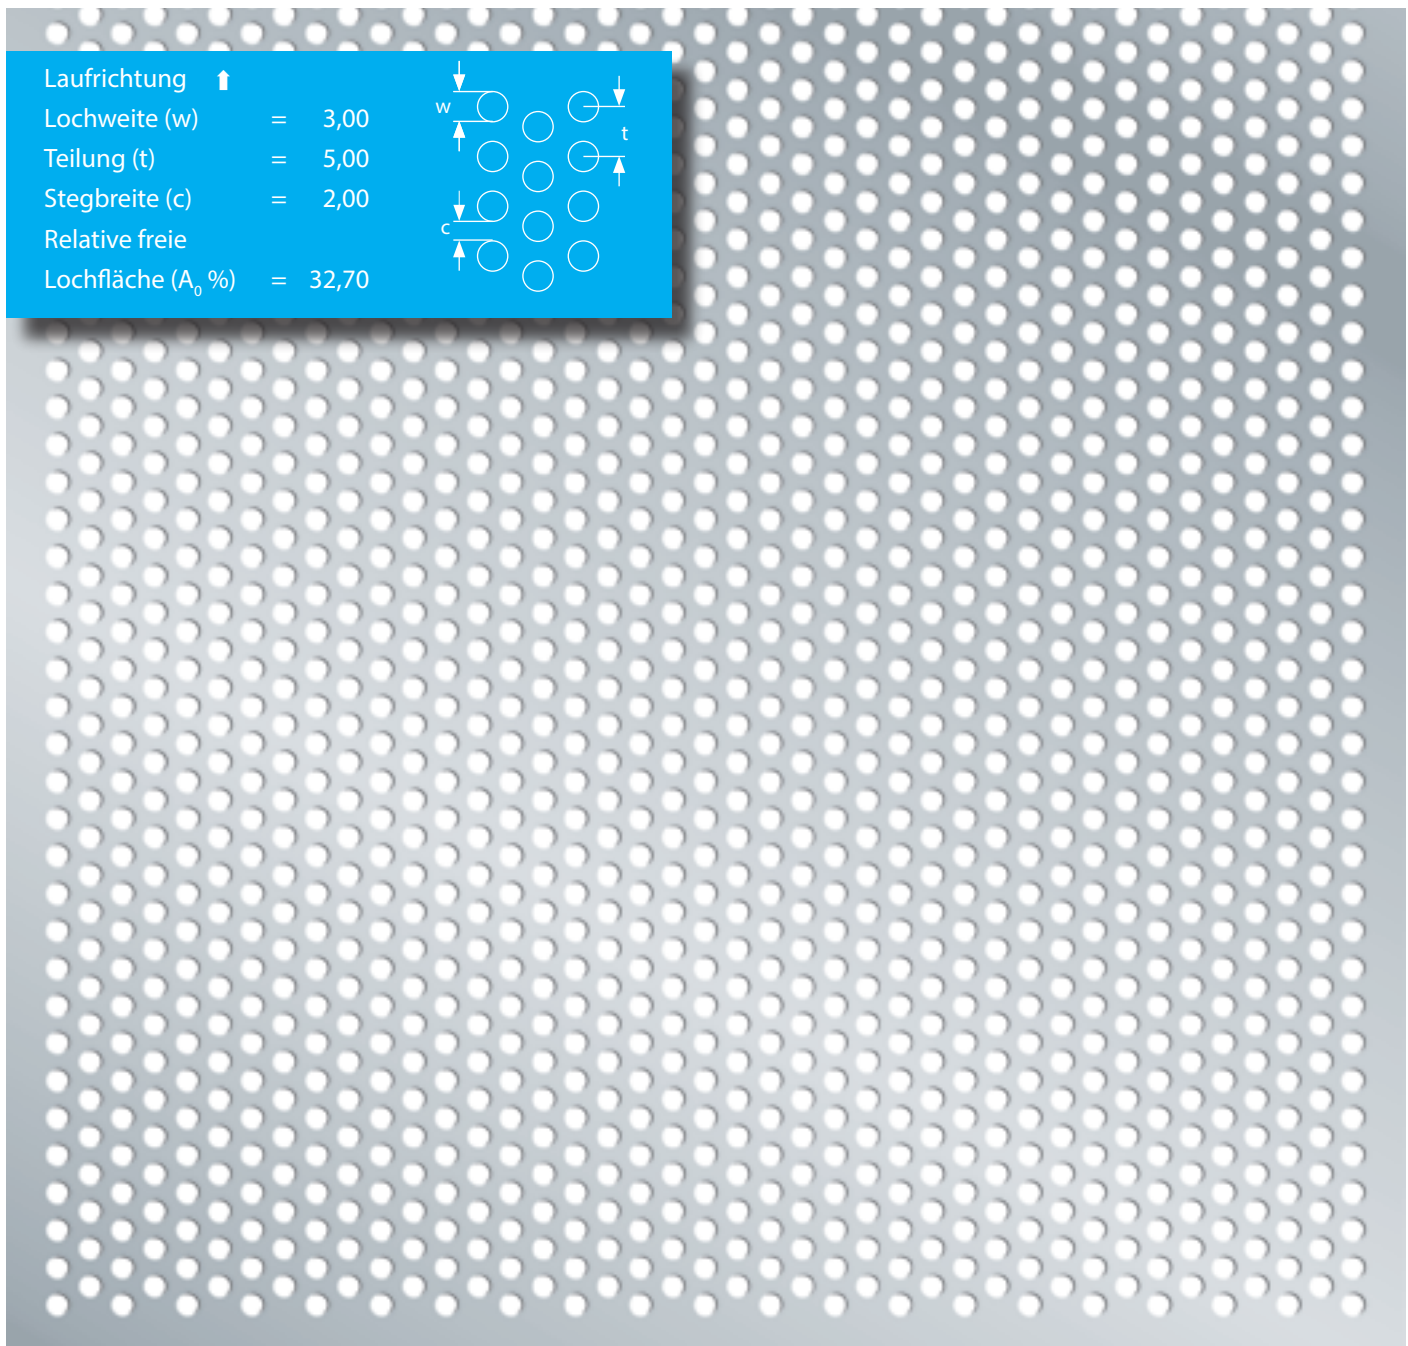

Laufrichtung ↑  
 Lochweite (w) = 3,00  
 Teilung (t) = 5,00  
 Stegbreite (c) = 2,00  
 Relative freie Lochfläche (A<sub>0</sub> %) = 32,70