


Lg DIN 24041

Slot perforations, straight

Hole width = w
 Spacing = t
 Margin width = c
 Relative open area = $A_0\%$

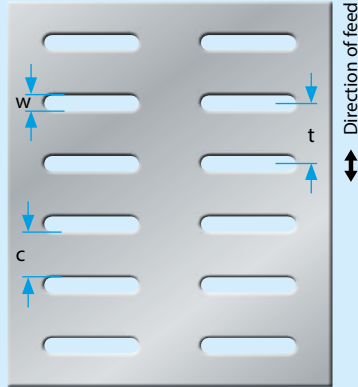

Material:


○ = Sheet steel/Aluminium

● = Stainless steel


Further details on page 24

Available in all grades

Perforation pattern DIN-specification	Thickn. (s) in mm / up to Width (a ₁ /b ₂) 1000 mm							Thickn. (s) in mm / up to Width (a ₁ /b ₂) 1250 mm							Thickn. (s) in mm / up to Width (a ₁ /b ₂) 1500 mm															
	w	l	t ₁	t ₂	A ₀ %	0.50	0.75	1.00	1.25	1.50	2.00	2.50	3.00	0.50	0.75	1.00	1.25	1.50	2.00	2.50	3.00	0.50	0.75	1.00	1.25	1.50	2.00	2.50	3.00	
Lg 4.00 - 25.00	8.00	35.00	34.50					○	○	○							○	○	○						○	○	○			
Lg 5.00 - 15.00	15.00	25.00	18.57						○										○							○				
Lg 8.00 - 50.00	24.16	66.00	24.22							○	○									○	○					○	○			
LgE9.00 - 53.00	18.80	63.10	40.21								○																			

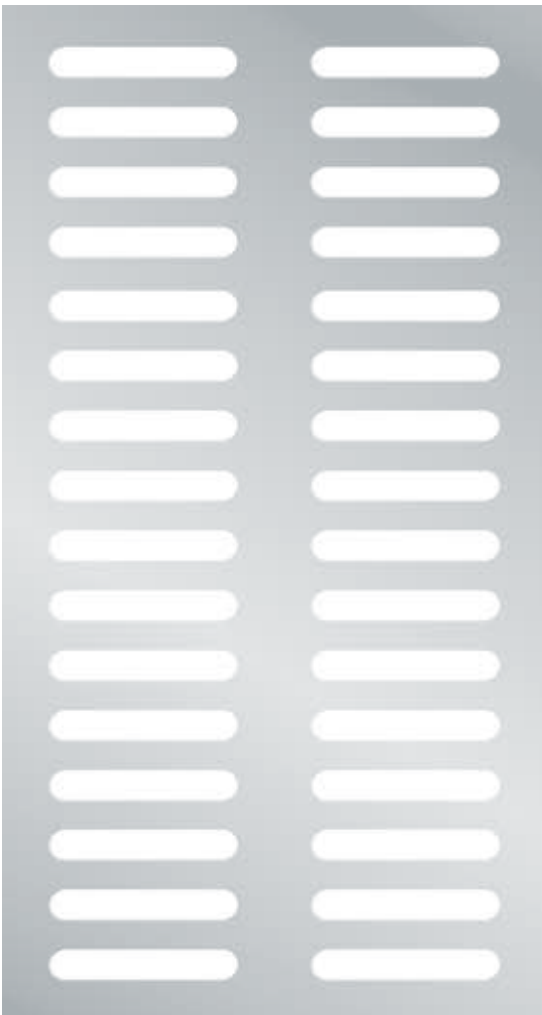

Lg 4.00-25.00 (1:1 scale)

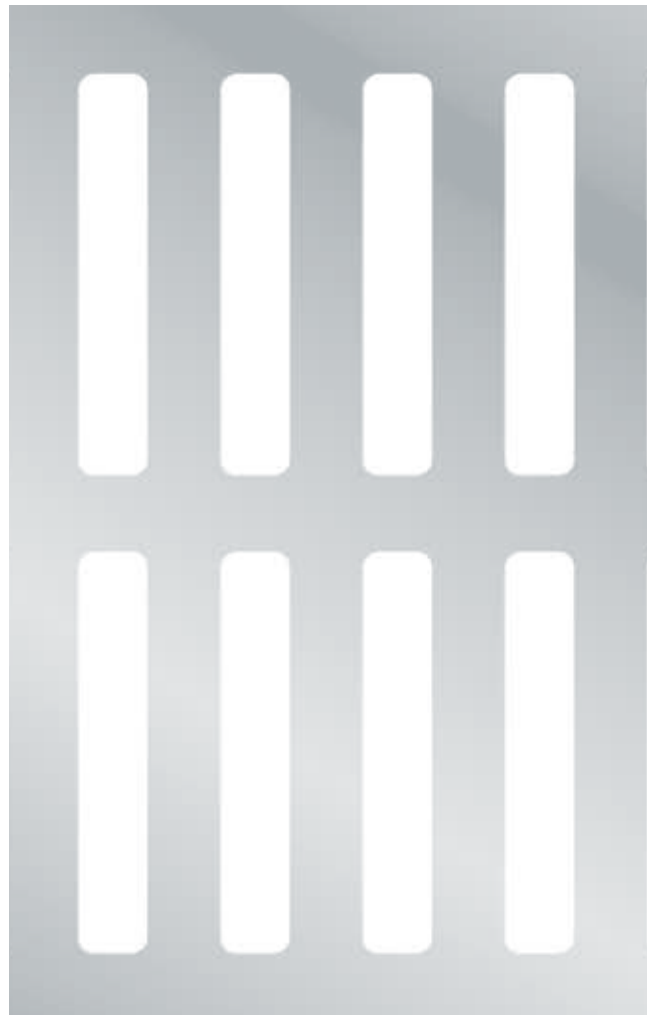

LgE 9.00-53.00 (1:1 scale)