

# Rundlochung versetzt

## Rv 10,00-15,00


DIN 24041



1:1 Darstellung

Material	Kleinformat 1000 x 2000 mm							Mittelformat 1250 x 2500 mm							Großformat 1500 x 3000 mm										
	Dicke in mm							Dicke in mm							Dicke in mm										
	0,50	0,75	1,00	1,25	1,50	2,00	2,50	3,00	0,50	0,75	1,00	1,25	1,50	2,00	2,50	3,00	0,50	0,75	1,00	1,25	1,50	2,00	2,50	3,00	
Stahl feuerverzinkt*			●		●	●							●	●	●								●		
Stahl			●		●	●		●					●	●	●								●		
Edelstahl 1.4301 (AISI 304)																									
Aluminium AL 99,5 (EN AW-1050A)			●		●	●									●										
Aluminium ALMG3 (EN AW-5754)																									

\* feuerverzinktes Vormaterial

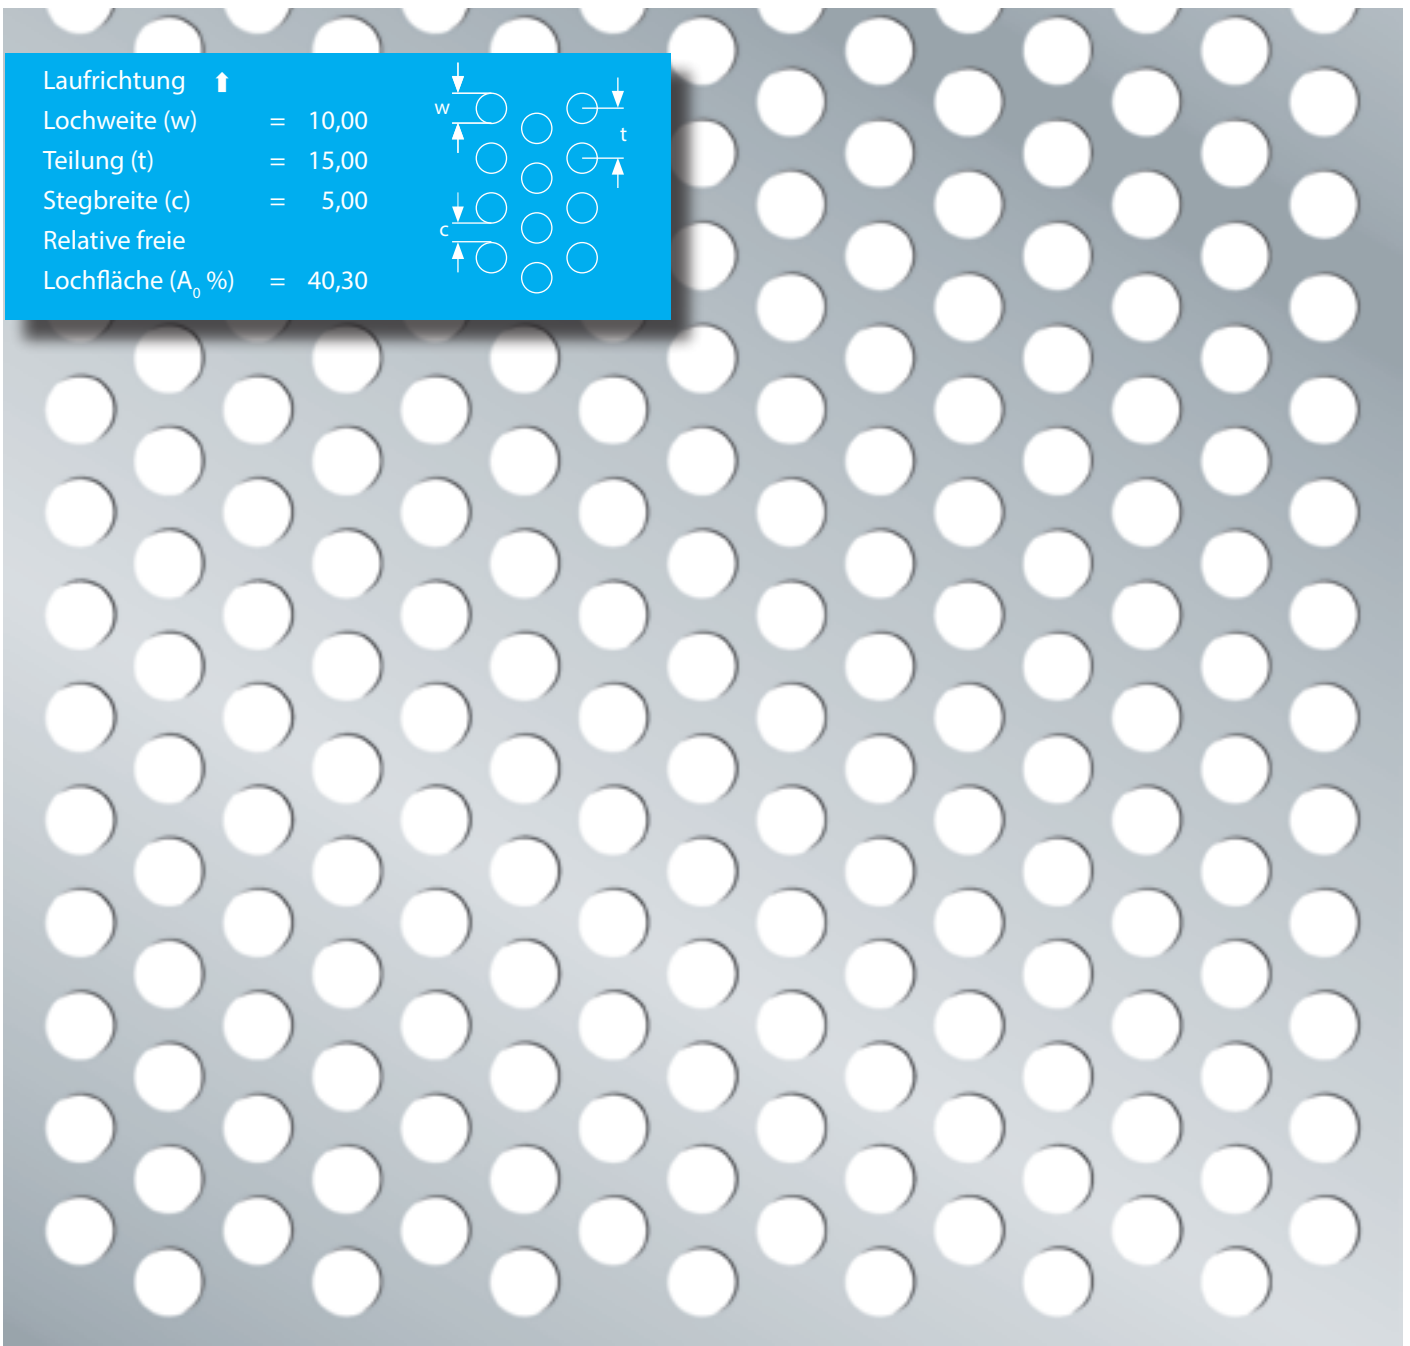

Laufrichtung	↑	
Lochweite (w)	= 10,00	
Teilung (t)	= 15,00	
Stegbreite (c)	= 5,00	
Relative freie Lochfläche (A <sub>0</sub> %)	= 40,30	